
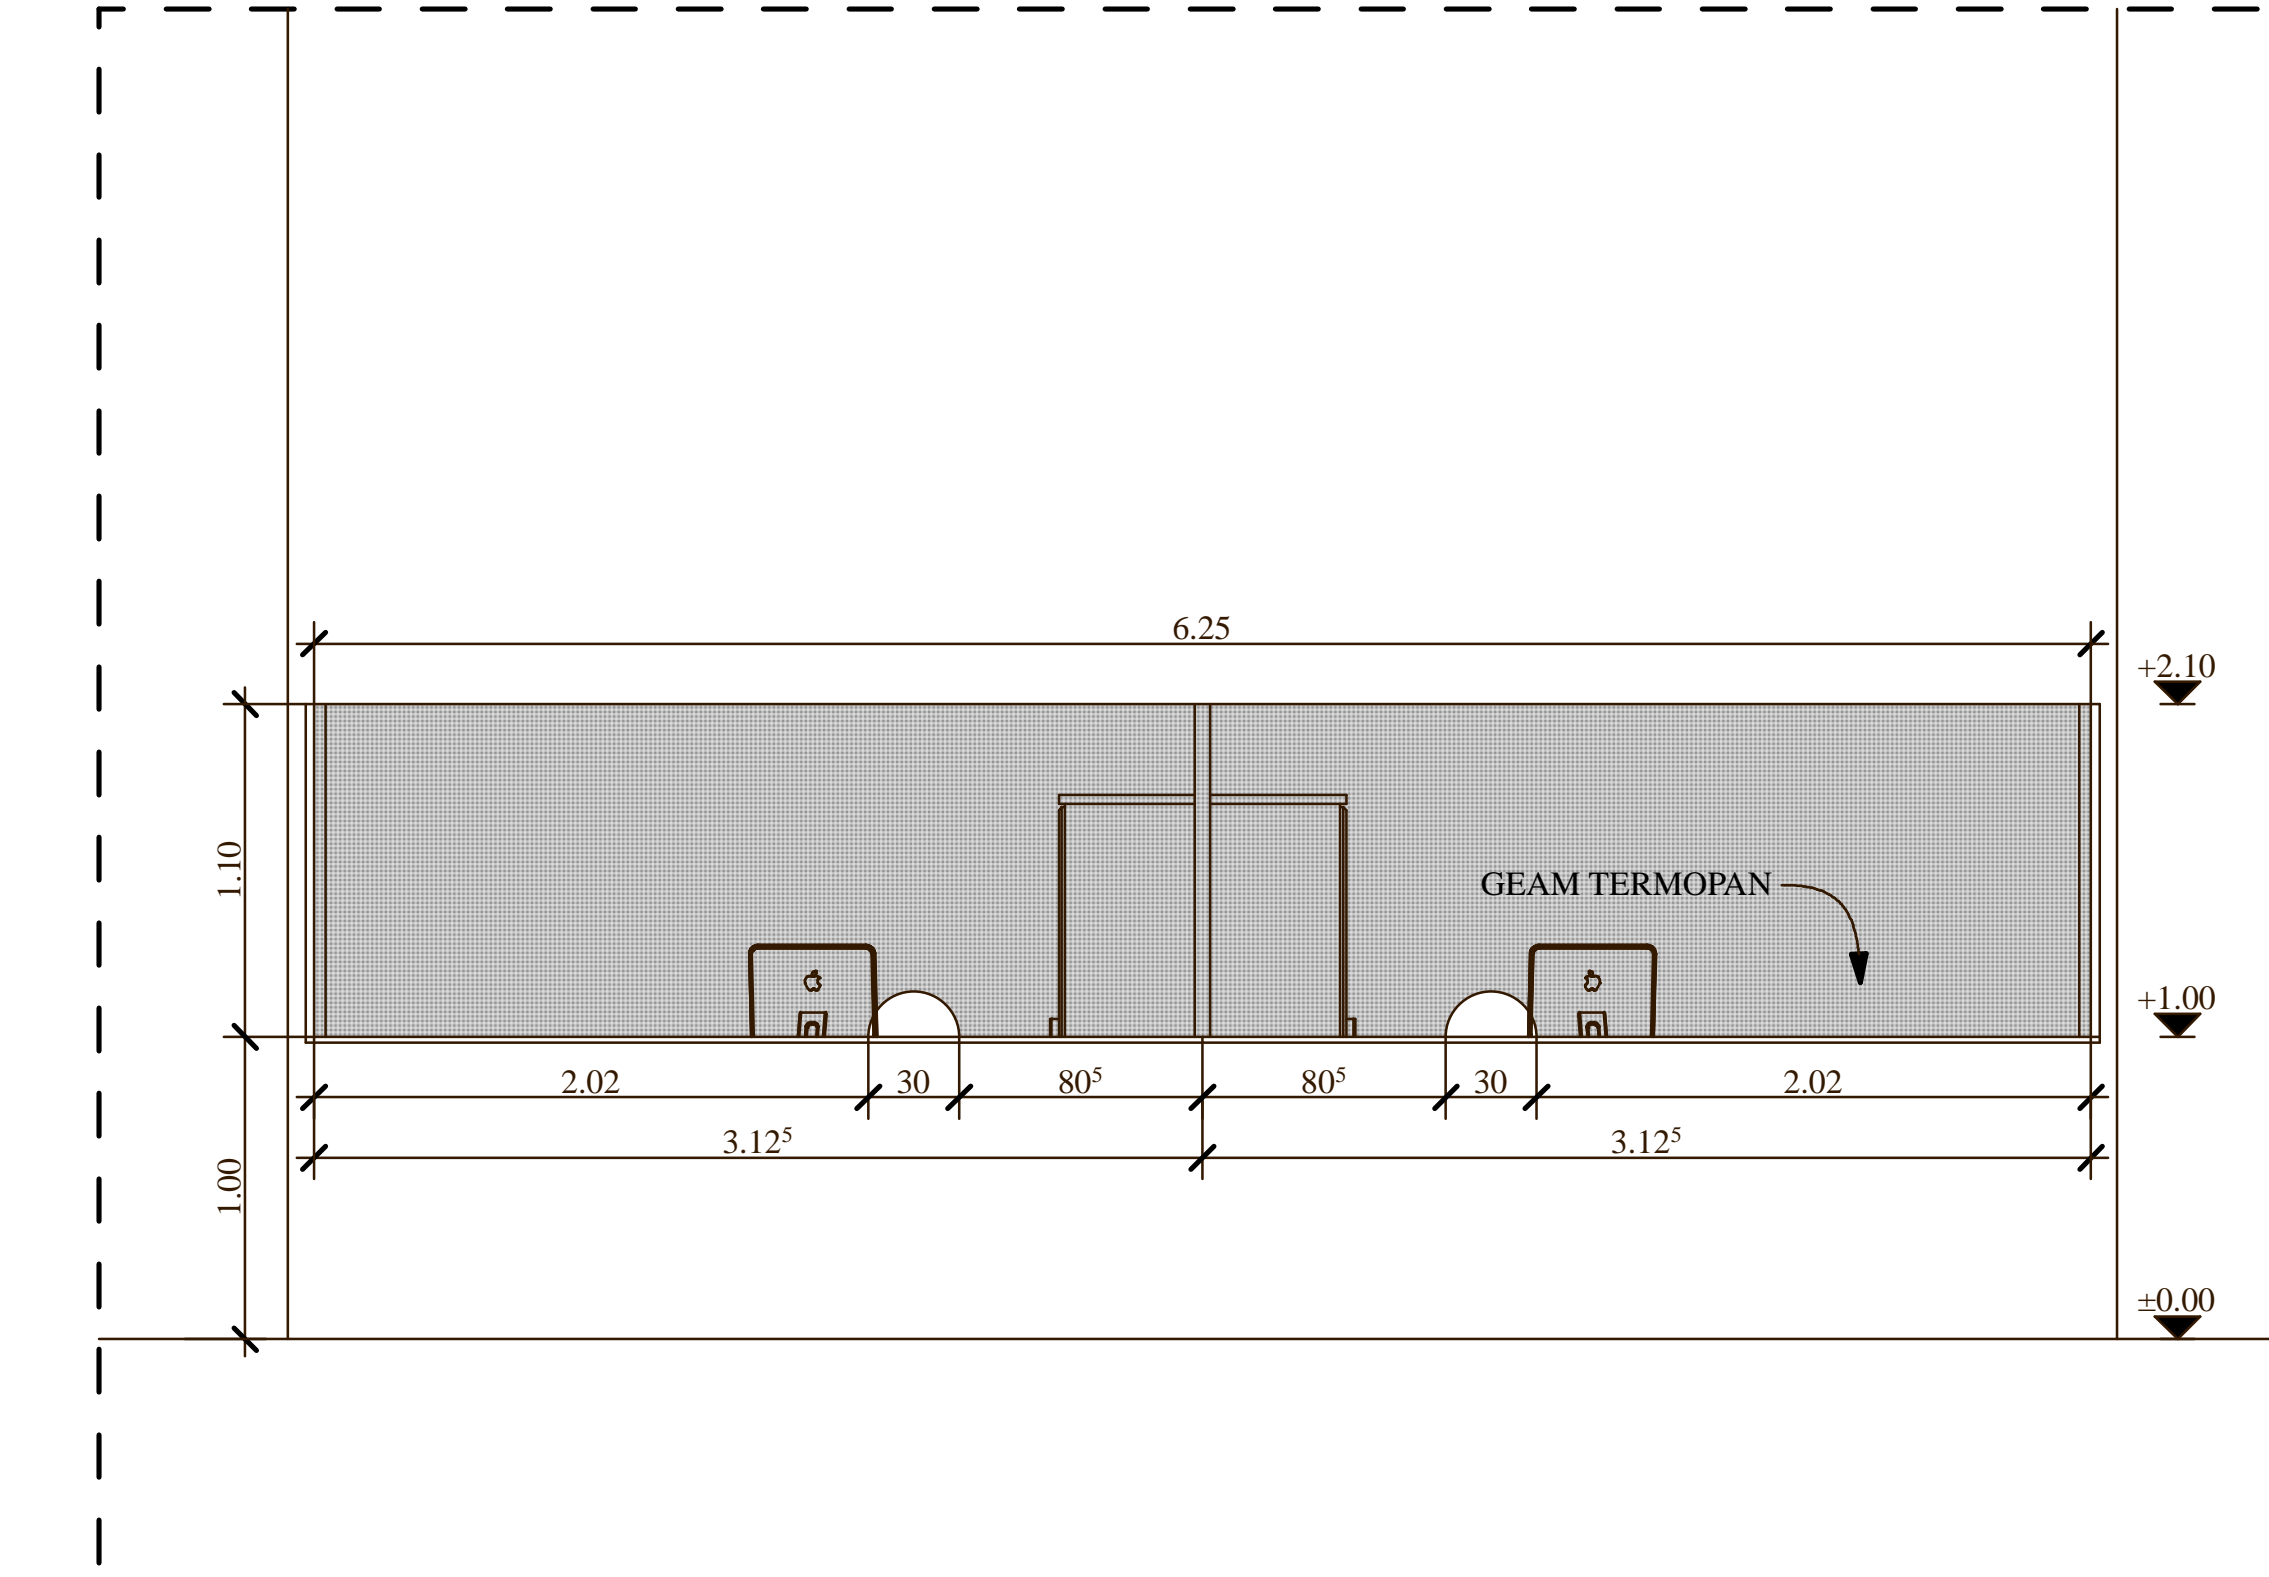
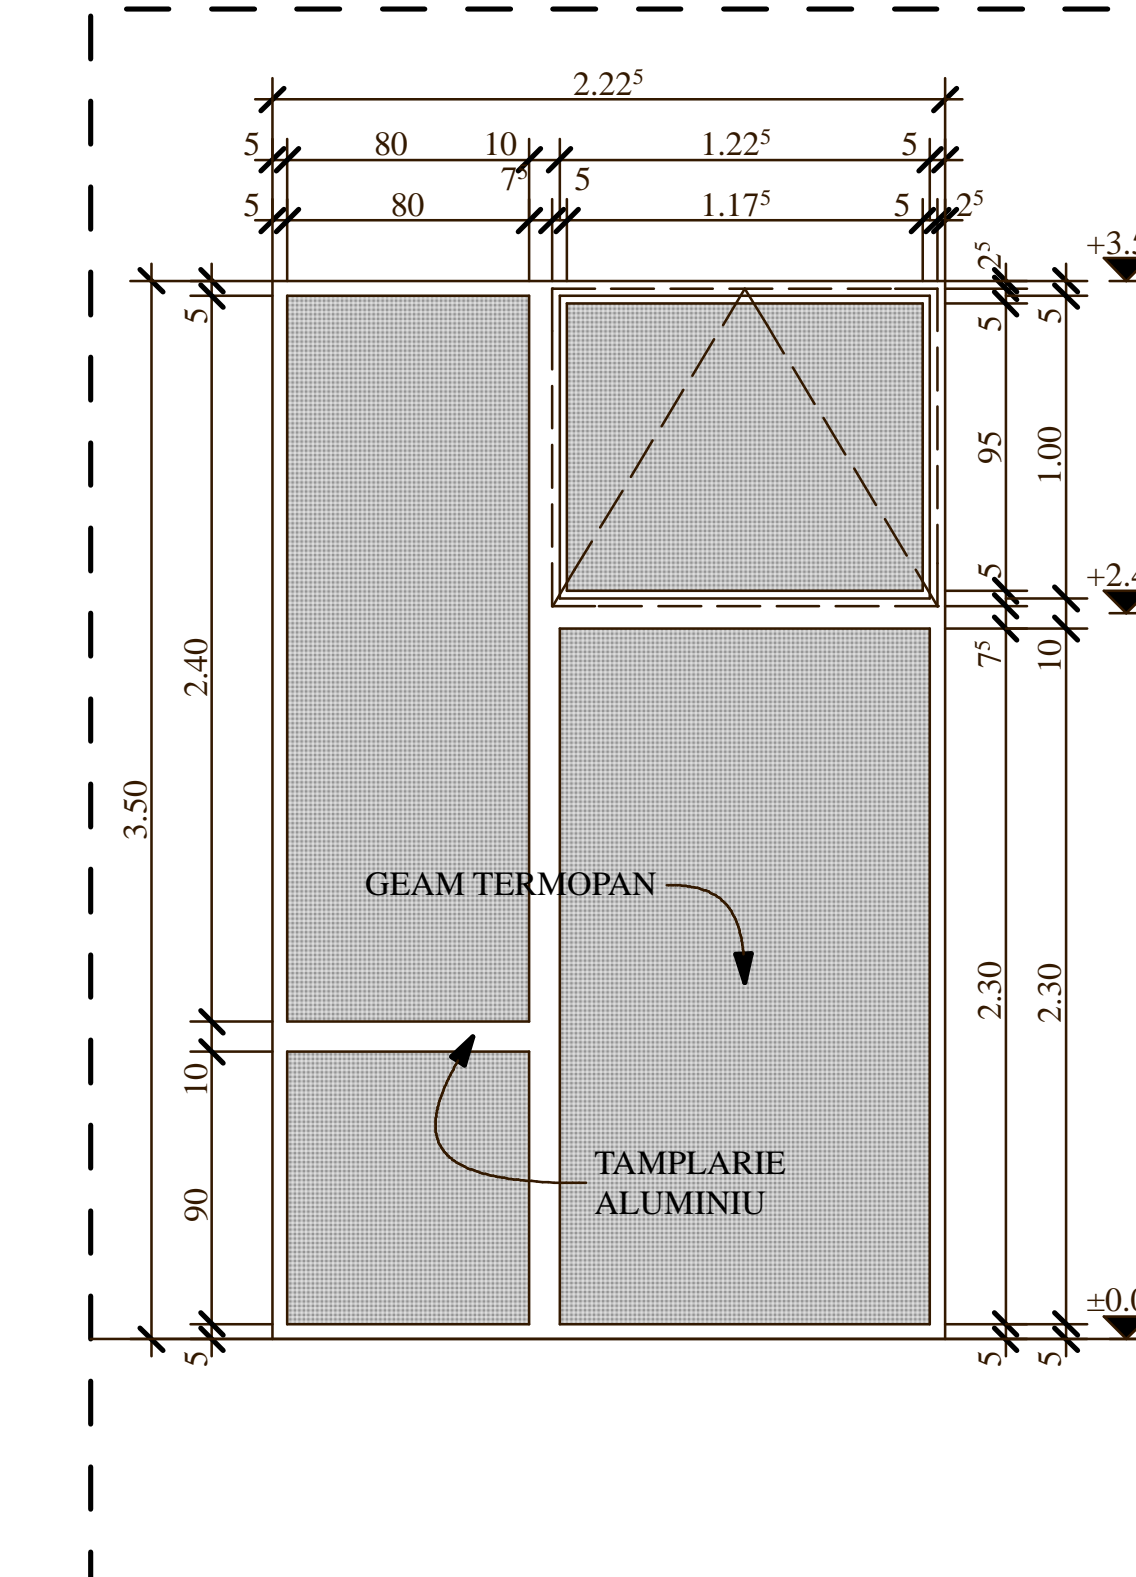
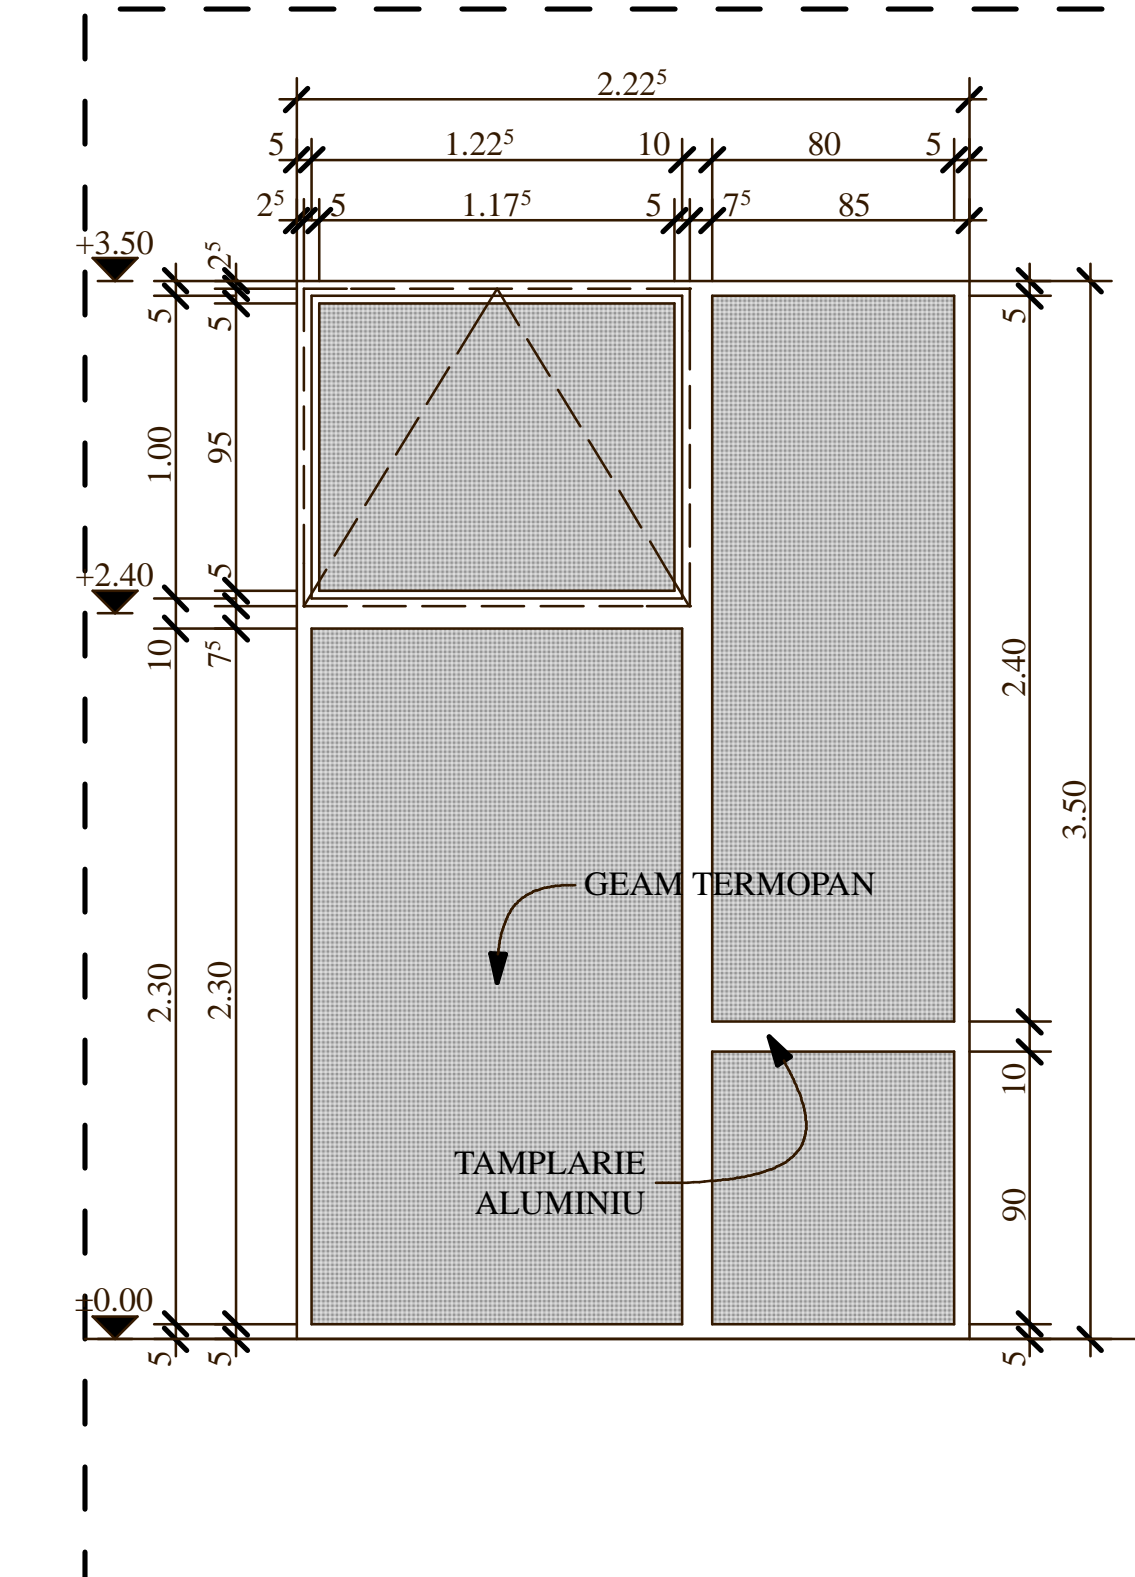
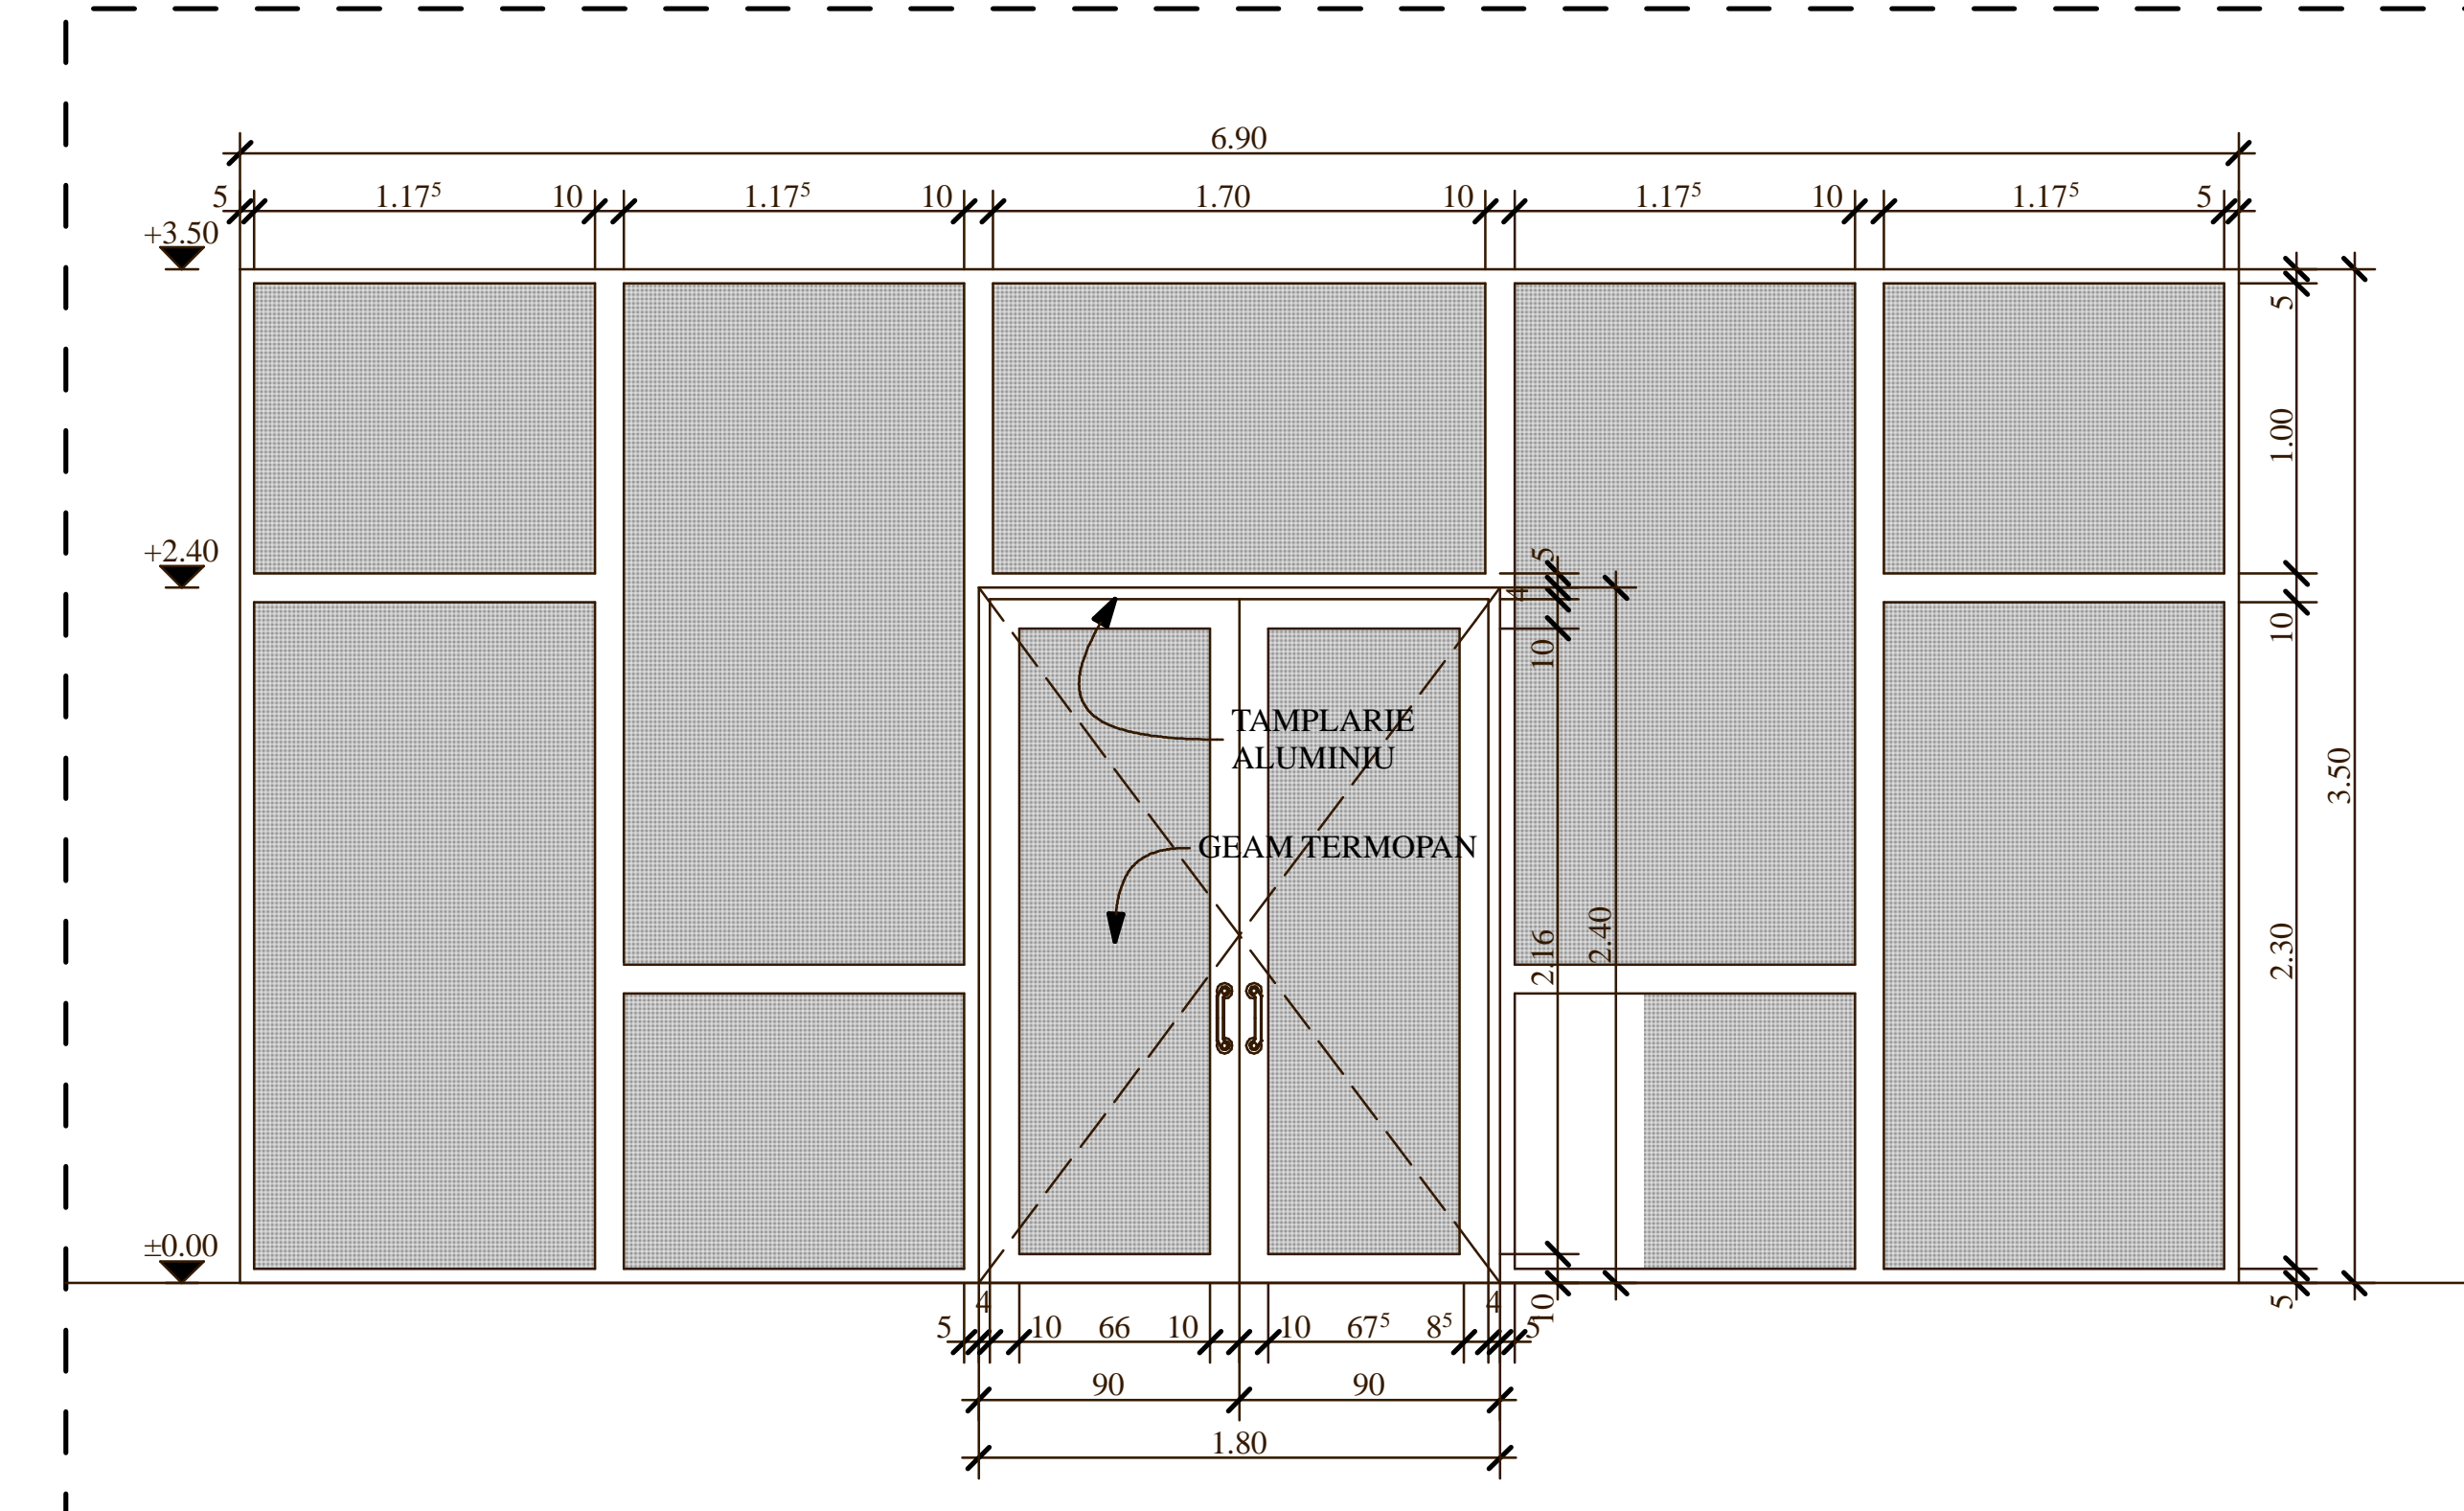
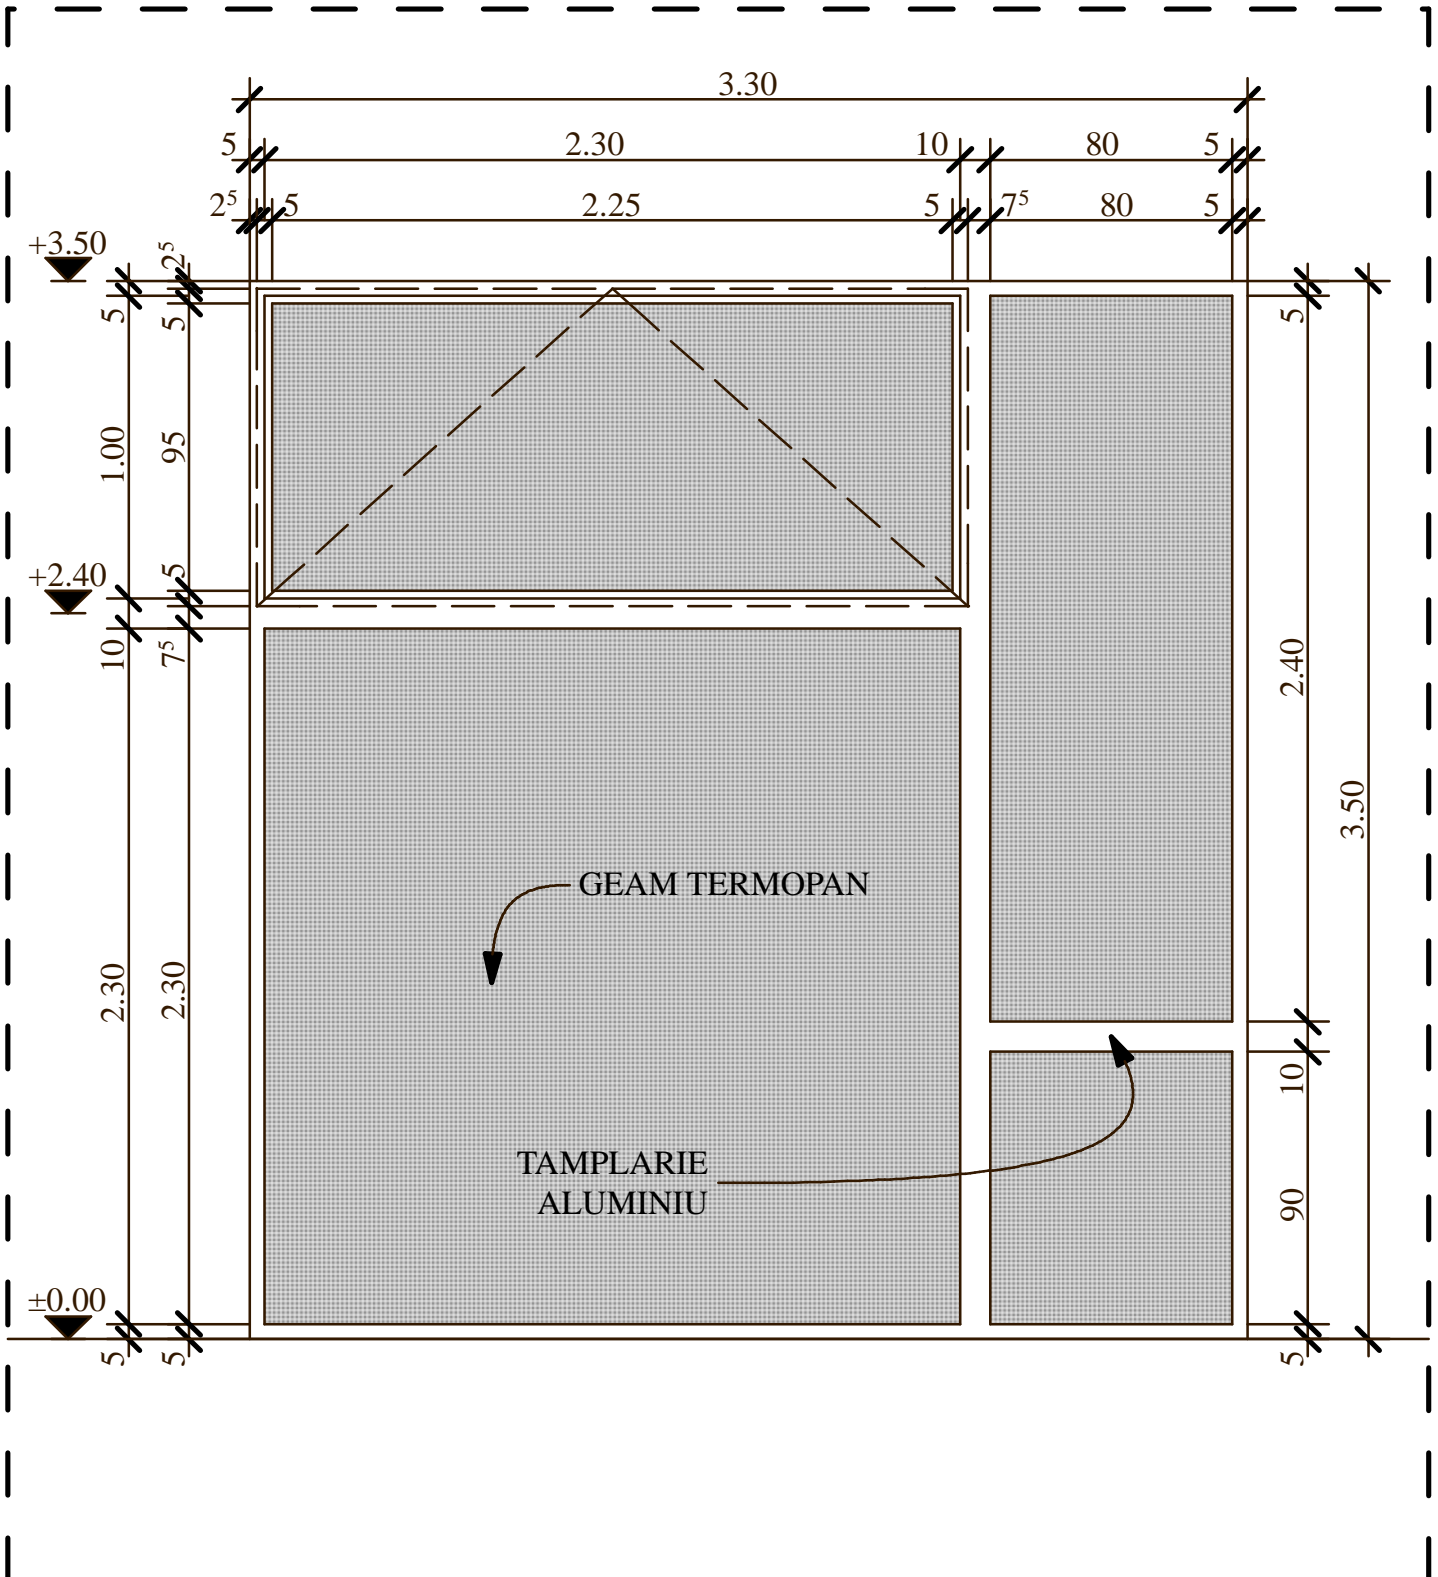
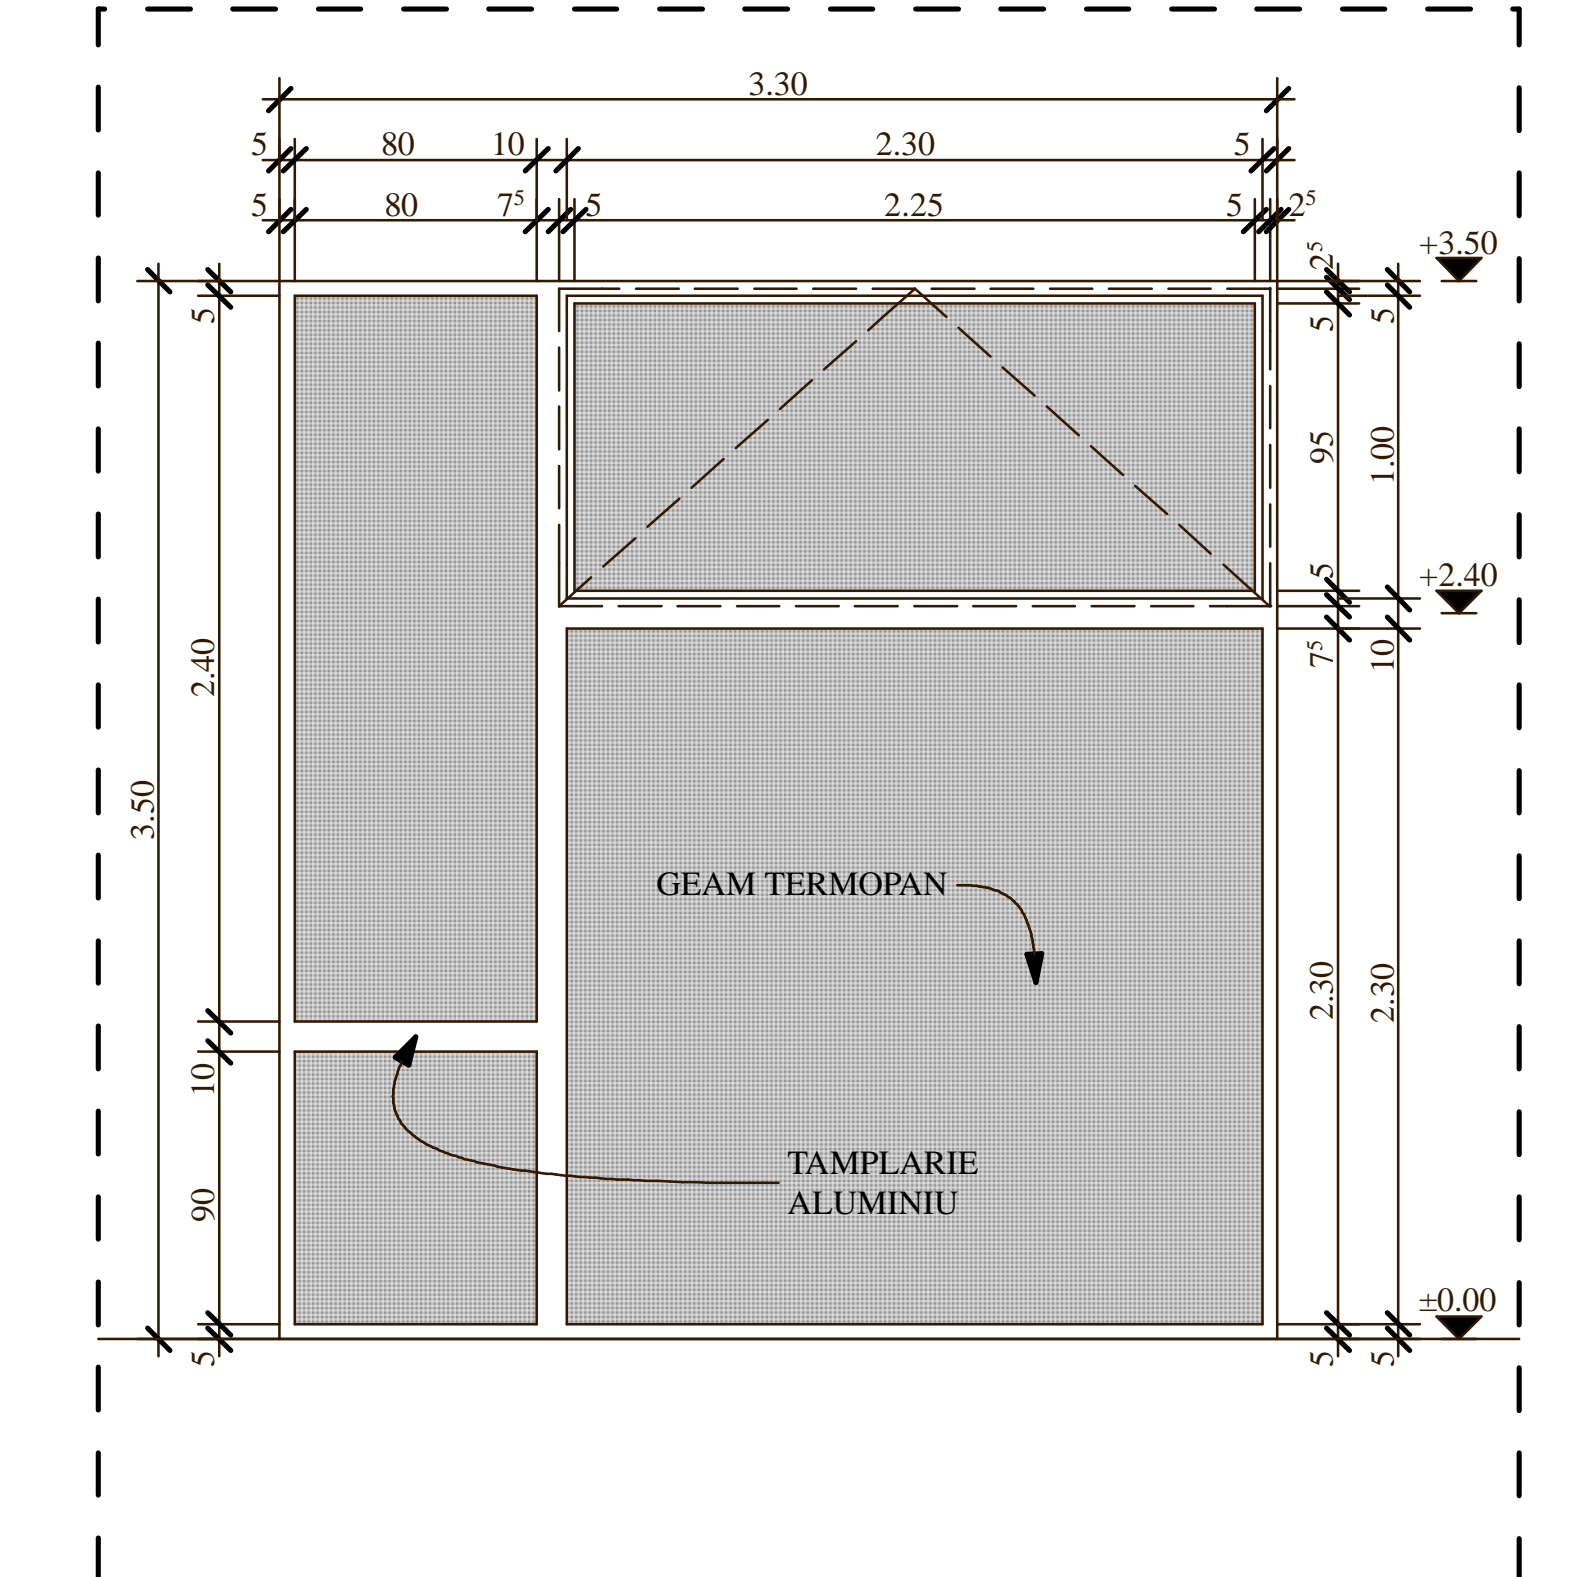
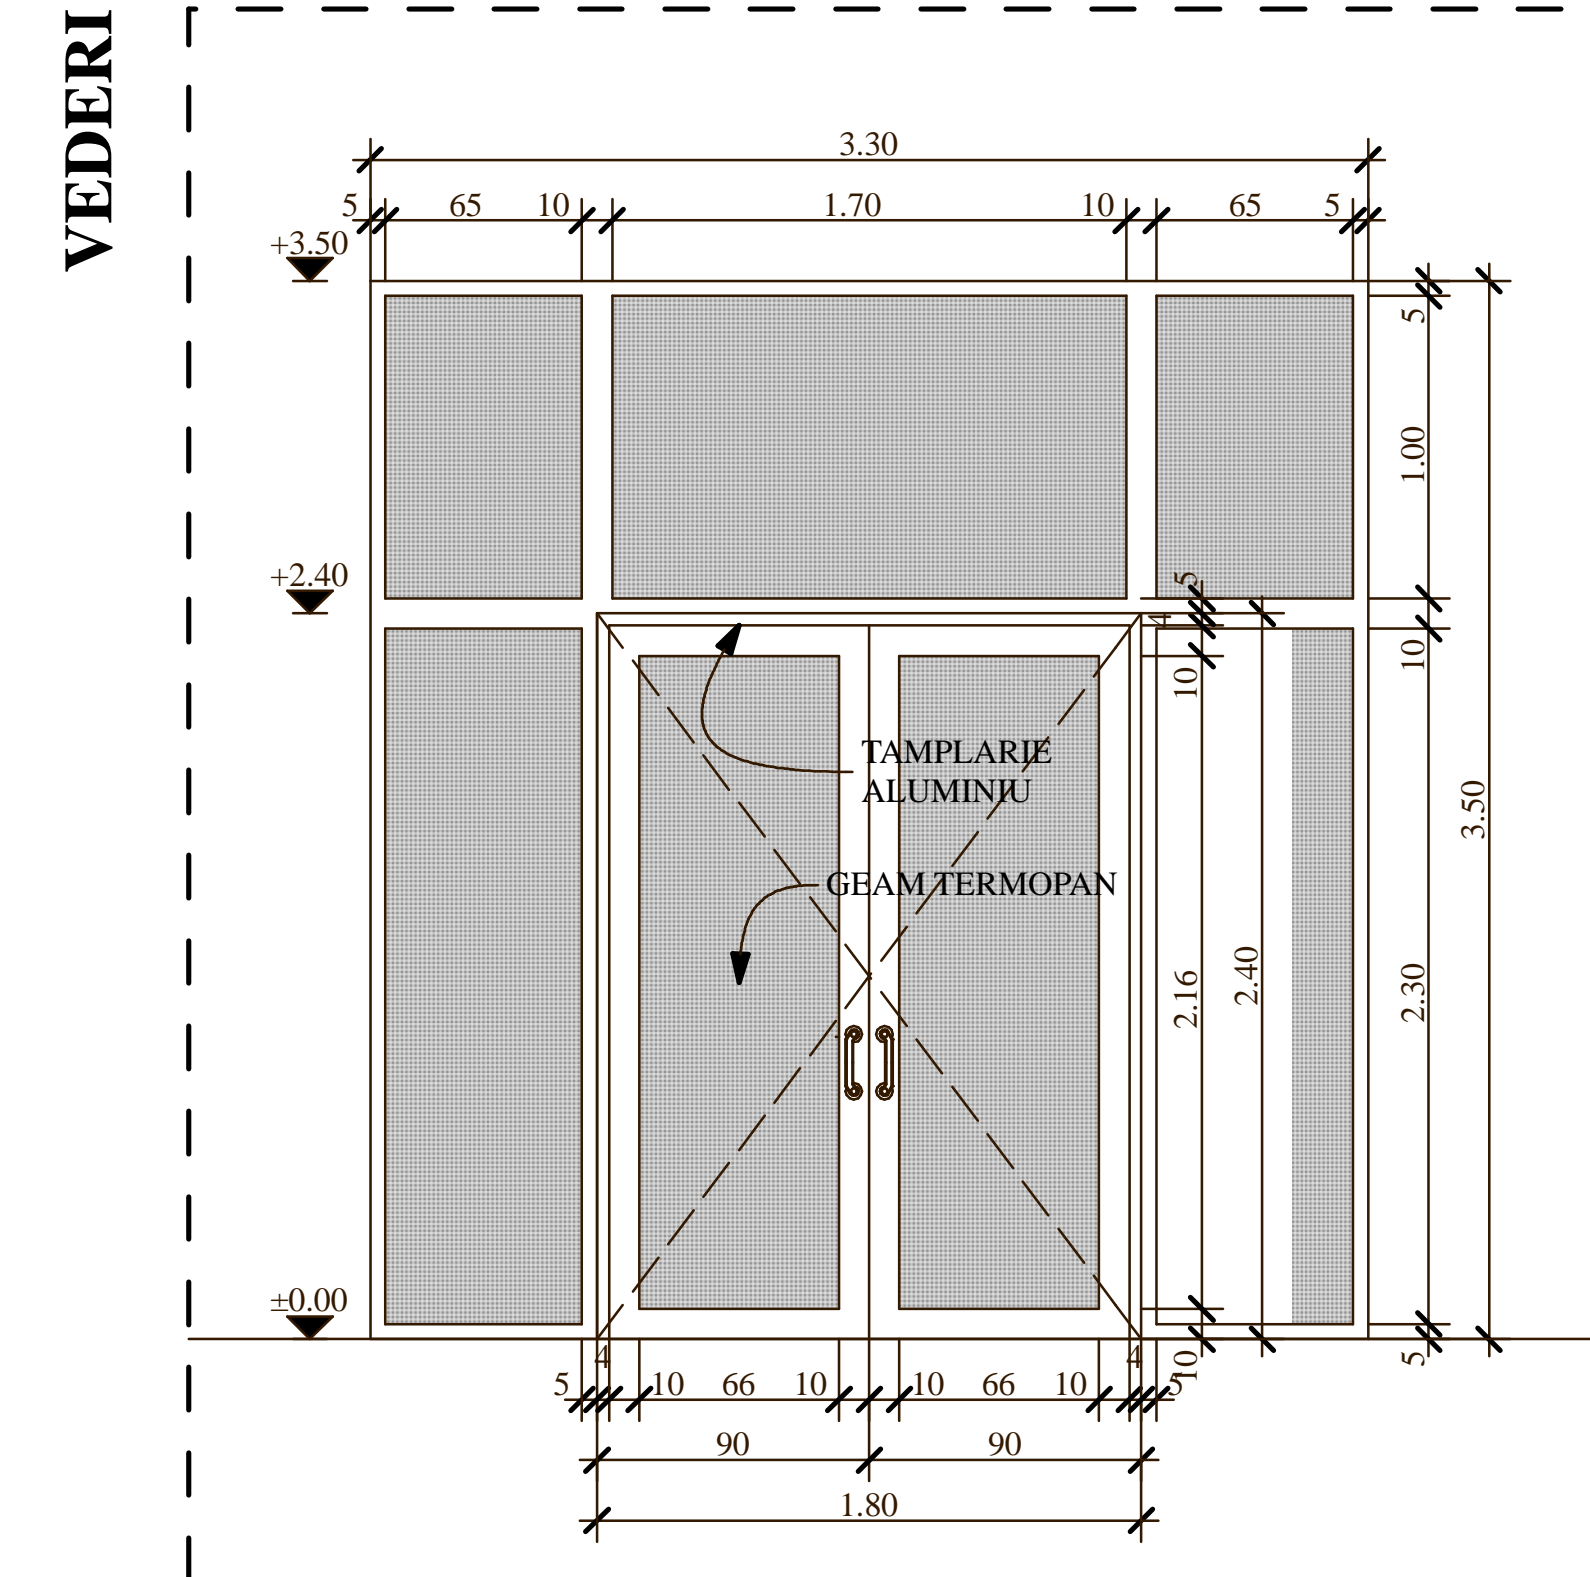
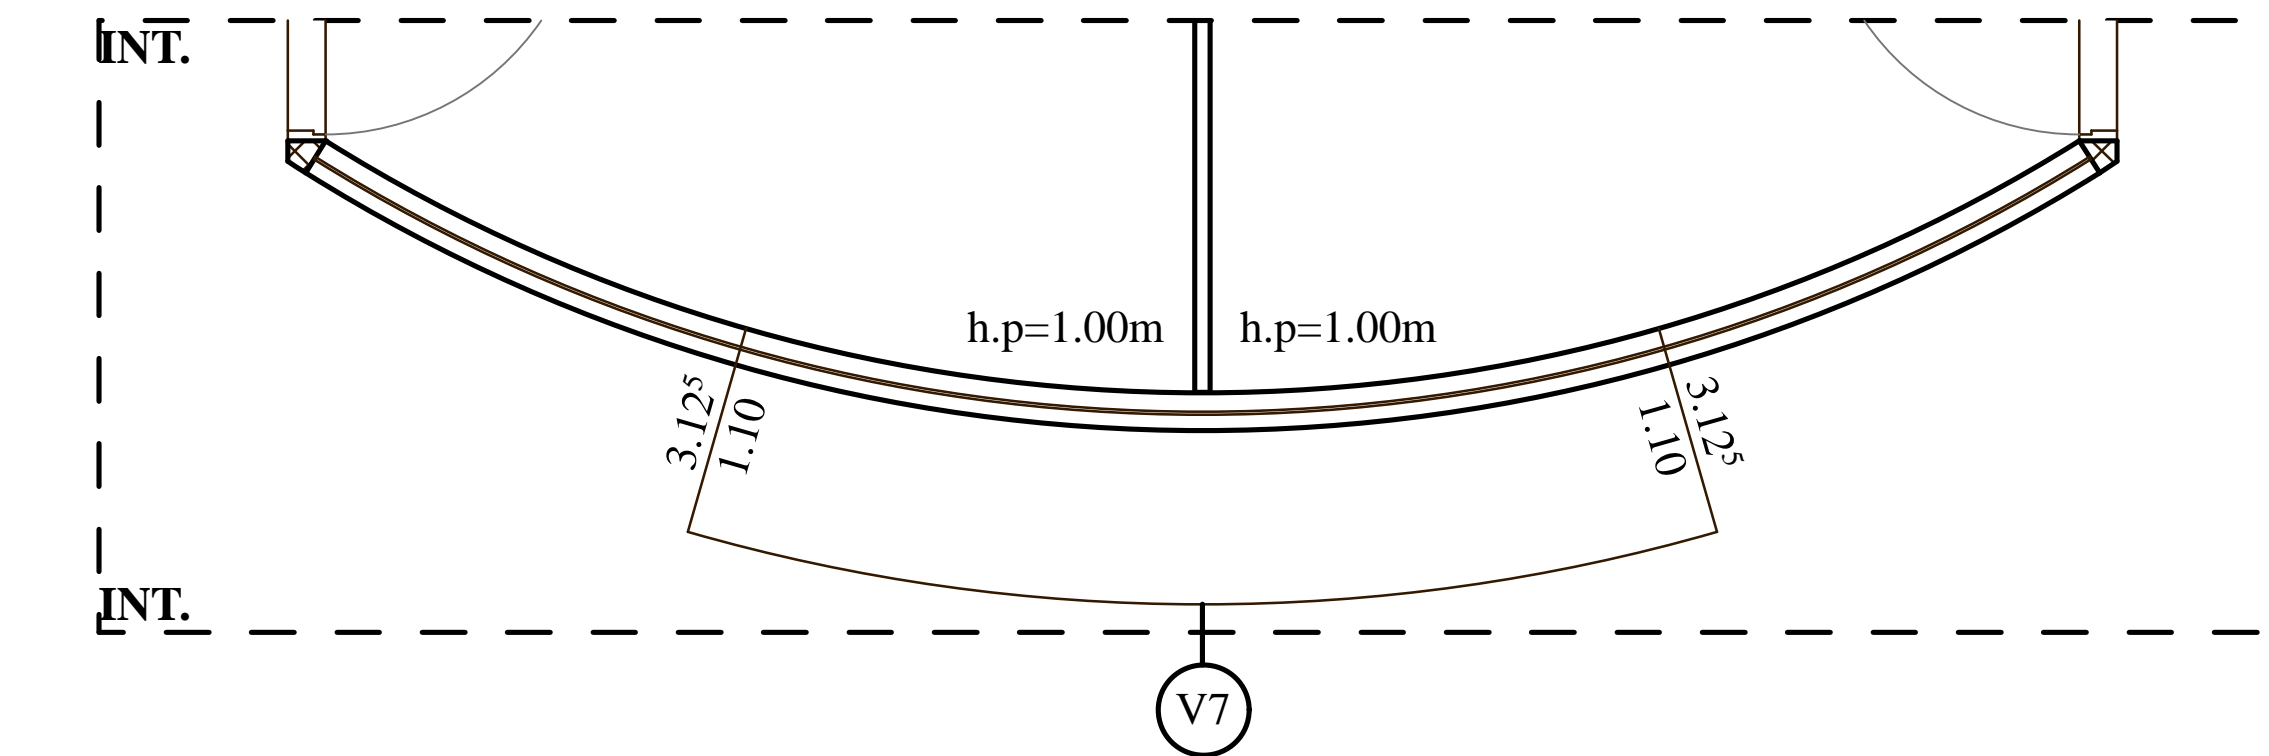
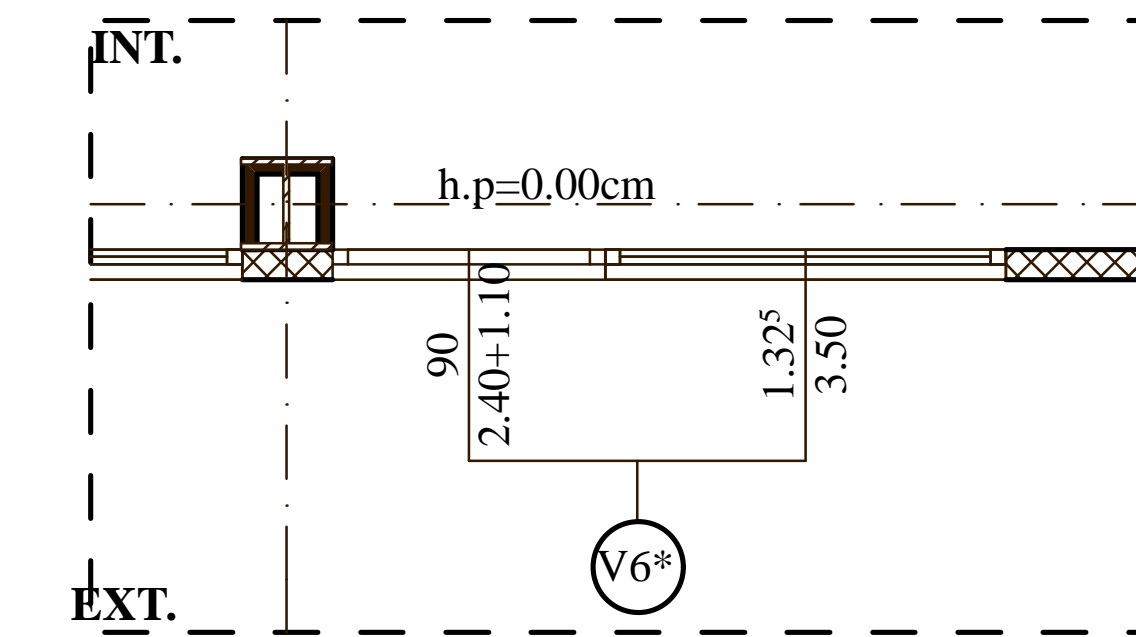
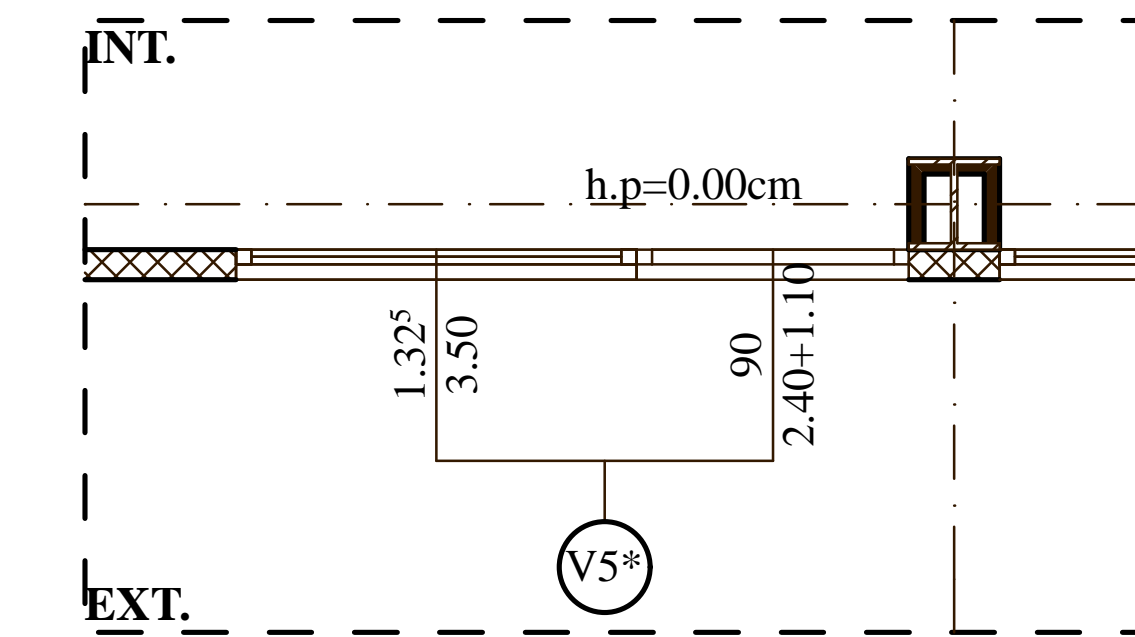
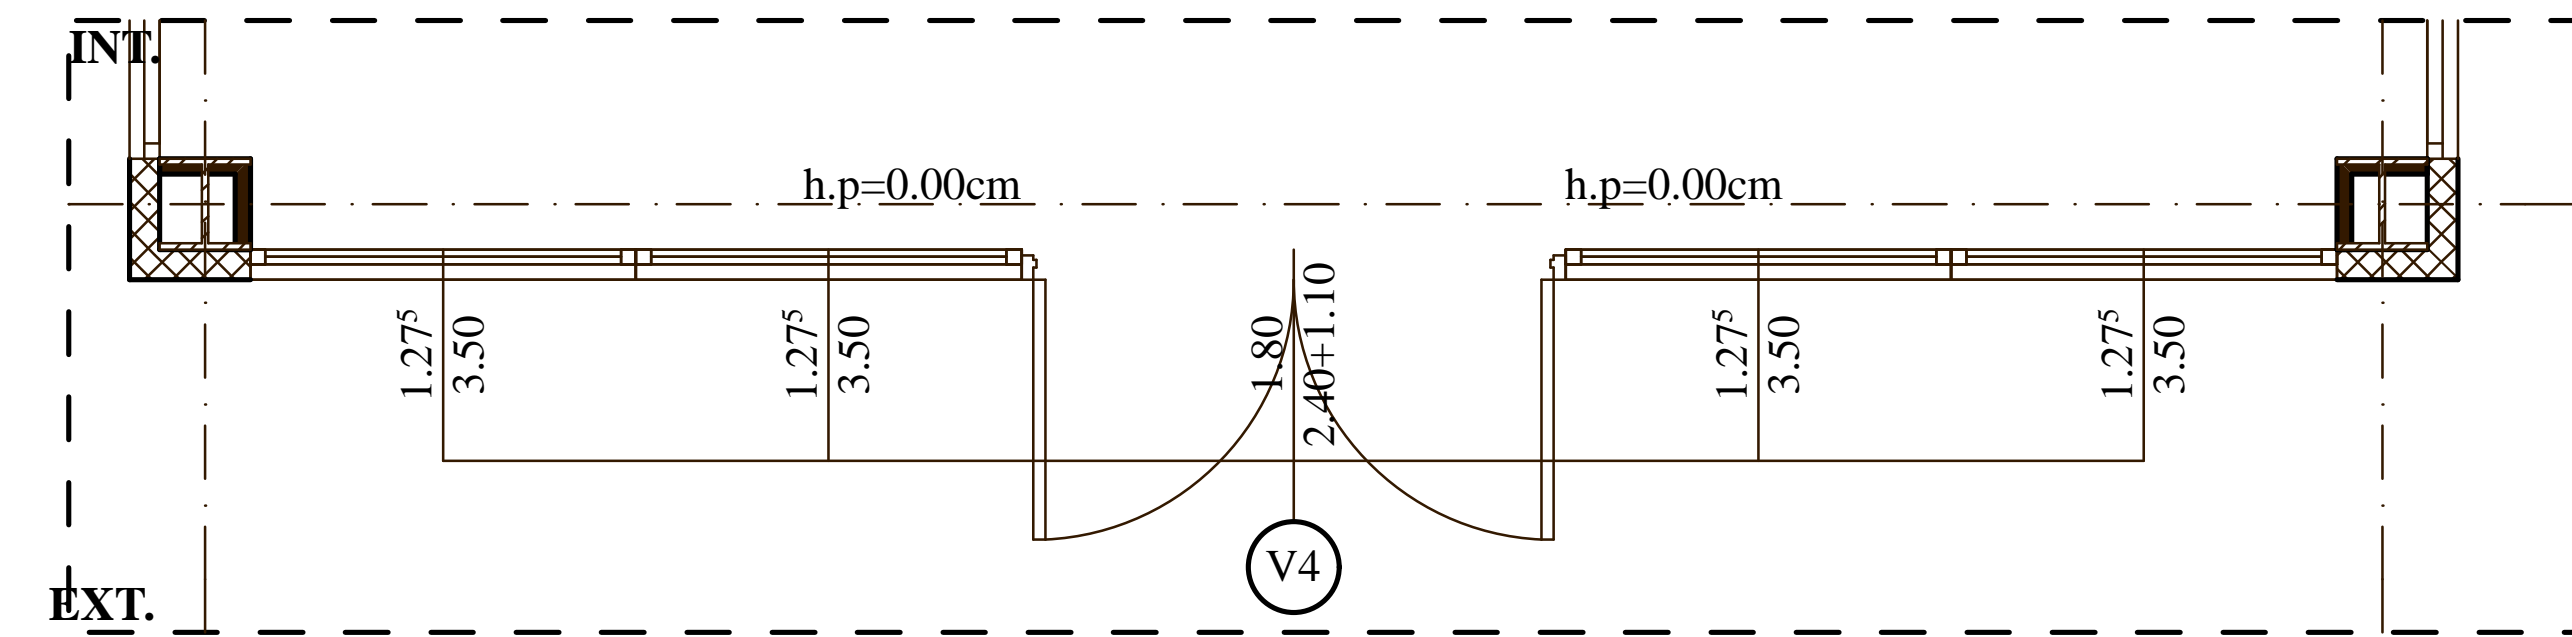
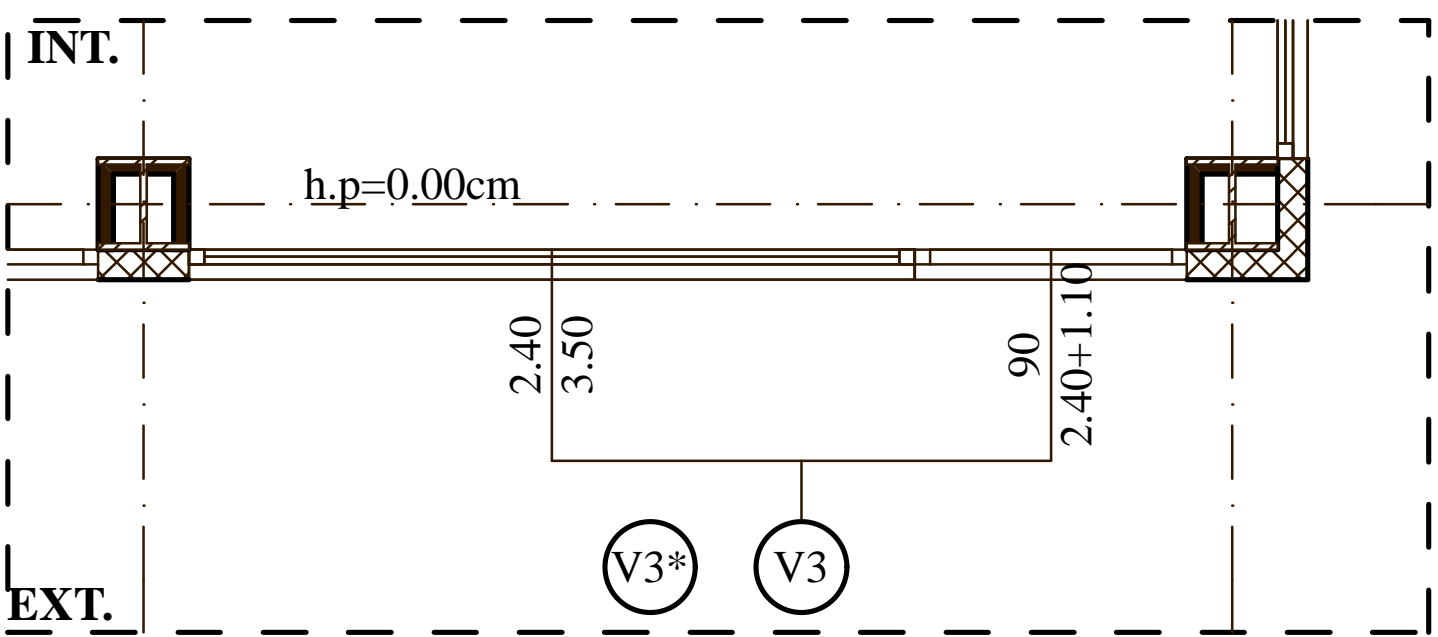
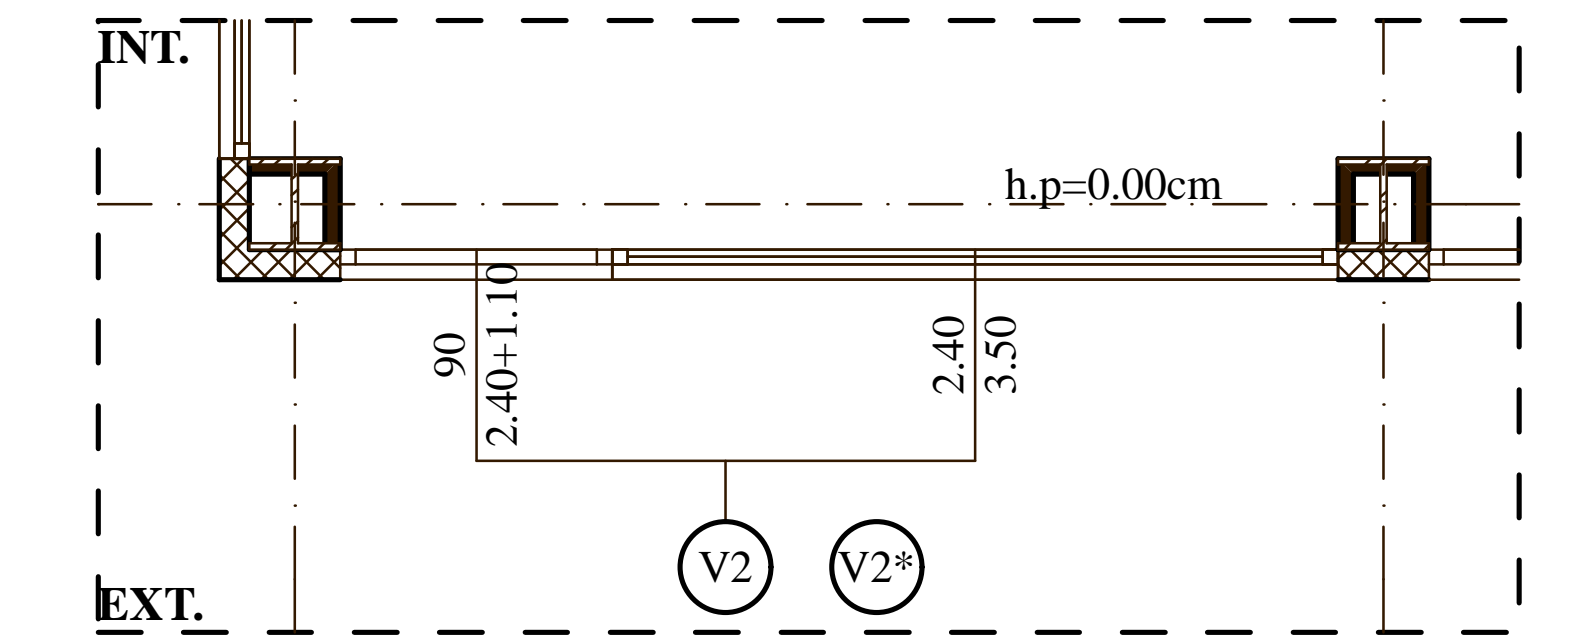


PLAN

VEDERI

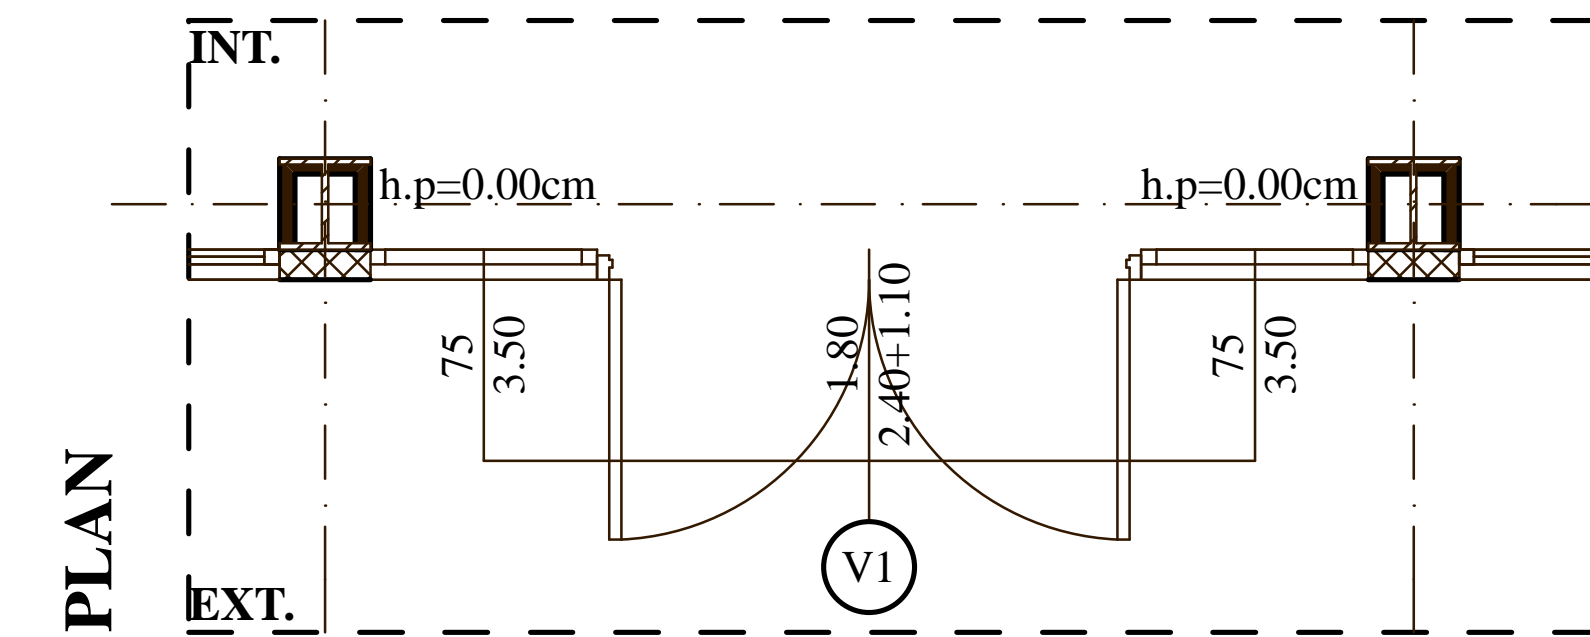

TABLOU VITRINA, TAMPLARIE DIN ALUMINIU
SCARA 1:25

SIMBOL OBIECT	DIMENSIUNEA GOLULUI	DIMENSIUNEA EXTERIOARA DE EXECUTIE	NR. BUCATI	SUPRF. DE DECONTARE	
				TAMPLARIE	TAMPLARIE
				UNITARE	TOTALE
1	2	3	4	5	6
V1	3.30x3.50	3300x3500	1	11.55	11.55
V2	3.30x3.50	3300x3500	3	11.55	34.65
V3	3.30x3.50	3300x3500	3	11.55	34.65
V4	6.90x3.50	6900x3500	2	24.15	48.30
V5	2.22x3.50	2220x3500	1	7.77	7.77
V6	2.22x3.50	2220x3500	1	7.77	7.77
V7	6.25x1.10	6250x1100	1	6.87	6.87
TOTAL			12		151.56

NOTA:

- NUMAI VITRINELE NOTATE IN PLAN CU STELUTA, EXEMPLU " V * ", VOR FI OSCILANTE
- VITRINELE, INAFARA DE V1 SI V4, NEHOTETE CU " V * ", VOR FI FIXE
- INAINTE DE EXECUTAREA TAMPLARIEI SE VA MASURA CU EXACTITATE GOLURILE DIN EXECUTIE;
- GEAMURILE VOR FI PREVAZUTE CU FOLIE DE PROTECTIE REFLEXIVA (IMPOTRIVA EFECTELOR CLADURII SI ALUMINII ORBITOARE A SOARELUI);
- FERESTRELE VOR FI PREVAZUTE CU FOLIE ANTIEFRACTIE (MARESTE SOLIDITATEA STICLEI, PASTRAND INTEGRITATEA SUPRAFETEI VITRATE LA SPARGERE SAU LA CRAPARE)
- CULOARE TAMPLARIE DE ALUMINIU RAL 5003;
- LA AGEREA CULORII TAMPLARIEI SE VA CONSULTA IN MOD OBLIGATORIU PROIECTANTUL;
- LA ALEGEREA MODELULUI MANERELOR SE VA CONSULTA IN MOD OBLIGATORIU PROIECTANTUL

COTA PARDOSEALA ±0.00
COTA PLACA -0.10

NOTA:

SE VA REALIZA O PROTECTIE LA FOC A STRUCTURII METALICE CU VOPEA TERMOSPUMANTA DE TIP "ALOREX" ANTIHOC W2, REZISTENTA LA FOC MIN 60min.

OMOLOGATA DE CATRE INSPECTORATUL GENERAL AL POMPERILOR MILITARI

Verificator / Expert:	Nume:	Semnatura:	Cerinta:	Referat / Expertiza Nr. / Data:
S.C. PROIECT BIHOR S.A. Buc. Calea Bucuresti 100 Tel: 0211 410 10 10 Fax: 0211 410 10 10 E-mail: proiect@bihor.ro				
Beneficiar: S.C. O.T.L. S.A. Lucrare: AMPLASARE STATIE DE TRANSBORDARE (AUTOGARA) B-DUL DECEBAL - INT. CALEA ARADULUI MUN. ORADEA, JUD. BIHOR				
Contr. Nr.: 1983/2012				
Sef proiect: arh. Hermann A. Kristian				
Proiectat: arh. Hermann A. Kristian				
Verificat: arh. Dalca Codrea				
Scara: 1:25 Data: Ian. 2012				
TABLOU VITRINA TAMPLARIE DIN ALUMINIU				